
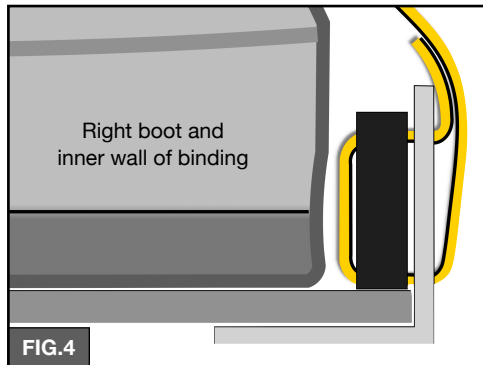
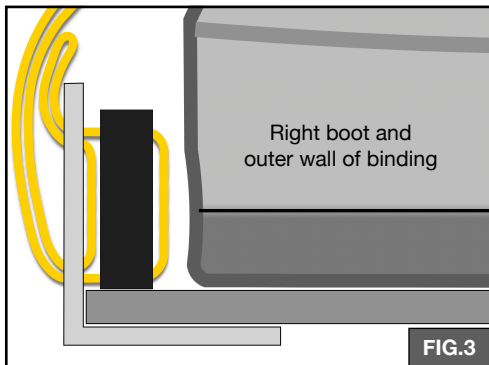
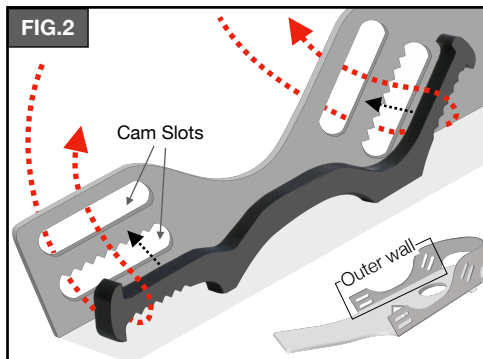


FLEXI BOLSTER

For Vintro and Sinch Bindings

Bolsters are used to take up slack if your boots have excessive play between the walls of your bindings.

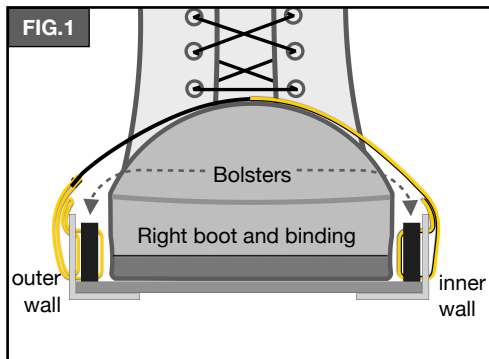

1. Start with the Right binding, front facing you. Loosen the front and rear strap loops in the cam slots on the outer sidewall (note: arrow in base plate points to outside of binding).
2. Place a bolster within the front and back strap loops, ensuring there is webbing on both sides of the bolster (Fig.2 & 3). Cinch the strap tight.
3. If you require the second bolster place it on the inner sidewall, between the wall and the strap, front and back (Fig.4). Cinch tight.
4. Repeat with Left binding