
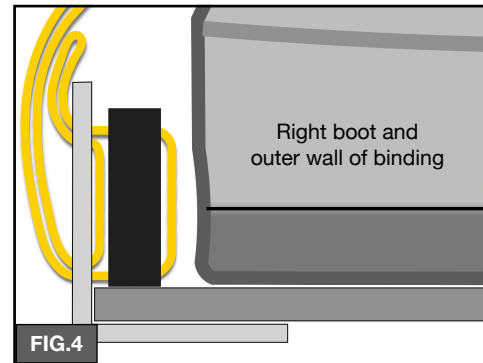
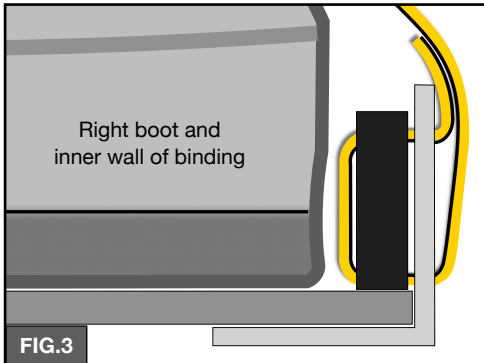
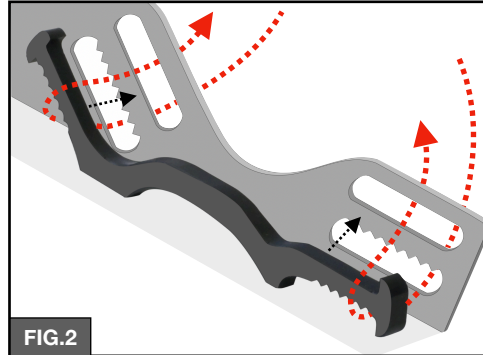


FLEXI BOLSTER

For Flexi Vintro and Sinch Bindings

Bolsters are used to take up slack if your boots have excessive play between the walls of your bindings.

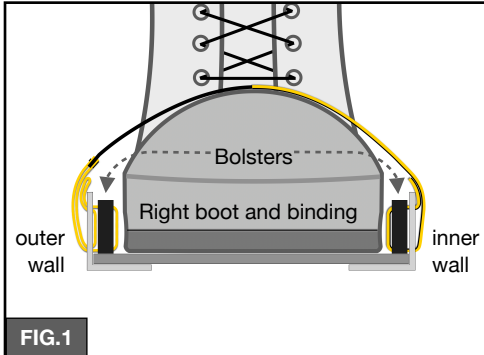

1. Loosen the webbing straps in the cam slots on Flexi binding sidewalls.
2. Place first bolster on the inside of the inner wall. Cam it between the wall and the strap, front and back, cinch the strap tight (Fig.2 & 3)
3. If you require the second bolster place it on the inside of the outer wall. This bolster should be placed within the webbing loop (Fig.4). Cinch tight.
4. Repeat with other binding