

Fig. 1.


1. Place your boot on the left base plate (arrow points to outside of boot) to determine your width configuration - narrow, regular, wide or differential fit (Fig.1.)

2. Locate the front outside buckle stem (a) and feed the strap through a minimum of 3 slots on the front left of base, starting at your preferred width and working inwards.

3. Feed the rear outside buckle stem (b) through the slots on rear left of base.

4. Repeat with inside stems (c and d).

5. Feed the heel retainer cord ends (e) through the holes in the base and tie off with a simple knot (f).

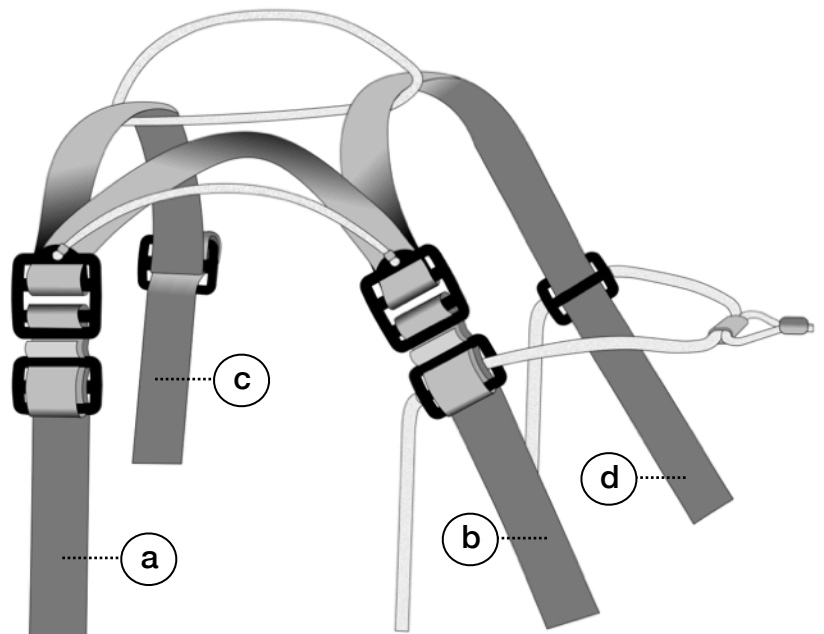

6. Repeat with right binding

7. Adjust straps to suit boot size and shape, ensuring front buckles are snug against base plate

8. Trim and seal strap ends as required

